

Specification:

Material:

1. Plastic Housing :PC/ABS
2. RJ45 contact material & finished:
 - 2-1.Phosphor Bronze with Nickel plated.
 - 2-2.Contact area : Gold plated.
3. IDC Housing: PC
4. IDC Terminal material & finished:
 - 4-1.Phosphor Bronze with Tin plated.
 - 4-2. 110 & KRONE tool compatible.
 - 4-3. Suitable for 22-26 AWG stranded and solid wire.



Performance:


- a. The sticker color codes combine two wirings of T568A & T568B.
- b. Insertion Force: 900 gms for 8 contacts.
- c. Retention Strength: 7.7 kgs between Jack and Plug.
- d. Operation Temperature: -30° to 60°.
- e. Durability:
 - e-1. Jack : 750 cycles Plug-Jack mating and unmating test,
Insertion cycles at 20 cycles/minute max.
Contact resistance test per 100 cycles.
 - e-2. IDC : Max. 200 punching times.
- f. The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 C.2 standard.



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DirectConnect® AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DirectConnect®.

DESCRIPTION : Model: DCC6PP12 Sku#: .10148

DATE	SCALE	 	ISSUE:	SHEET 1 OF 1	DIM.	TOLERANCE
SIZE	DRAWN				0~3	±0.05
UNIT	MM	APRD.	CUSTOMER:	DWG No.	3~20	±0.1
					20~50	±0.2
					50~100	±0.5

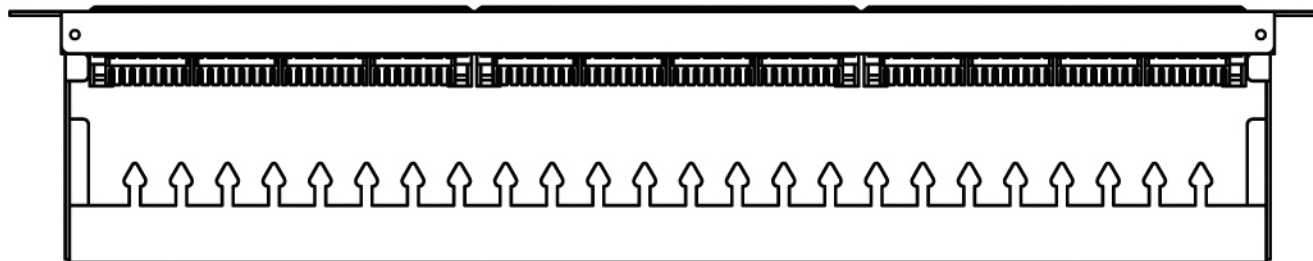

Specification:

Material:

- | | |
|---|--|
| 1. Metal frame: SPCC. | 4.IDC Housing: PC |
| 2. Plastic Housing :ABS | 5.IDC Terminal material & finished: |
| 3.RJ45 contact material & finished: | 4-1.Phosphor Bronze with Tin plated. |
| 2-1.Phosphor Bronze with Nickel plated. | 4-2. Krone/110 tool compatible. |
| 2-2.Contact area : Gold plated. | 4-3. Suitable for 22-26 AWG stranded and solid wire. |


Performance:

- The sticker color codes combine two wirings of T568A & T568B.
- Insertion Force: 900 gms for 8 contacts.
- Retention Strength: 7.7 kgs between Jack and Plug.
- Operation Temperature: -30° to 68°.
- Durability:
 - Jack : 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
 - IDC : Max. 200 punching times.
- The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 C.2 standard.



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DirectConnect® AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DirectConnect®.

DESCRIPTION : Model: DCC6PP24 Sku#: .11102

DATE	SCALE		ISSUE:	SHEET 1 OF 1	DIM.	TOLERANCE
SIZE	DRAWN				0~3	±0.05
UNIT	MM	APRD.	CUSTOMER:	DWG No.	3~20	±0.1
					20~50	±0.2
					50~100	±0.5